


**SANBRA FYFFE**

# TUCSON-A


5 Metre Head A Rated  
Circulating Pump

**Box quantity: 8**

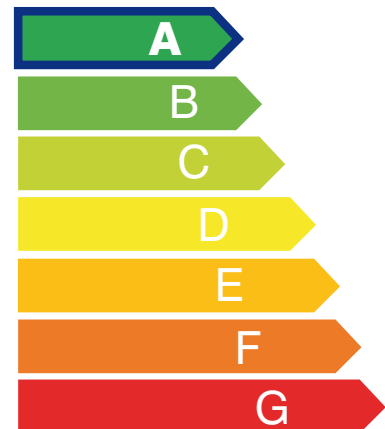

## TECHNICAL DATA

Code	771903
Efficiency	EEI ≤ 0.20
Voltage	Single Phase, 230 volts +/- 10%
Frequency	50 Hz
Speed	1 to 3 Speed, Auto
Isolation Class	F
Fluid Temperature Limits	-10C to 110C
Max Working Pressure	10 Bar
Minimum Working Pressure	0.05 bar @ 50C
Temperature Working Range	-10C to 50C
Waterproof Rating	IP44
Pump Weight	2.2 Kg

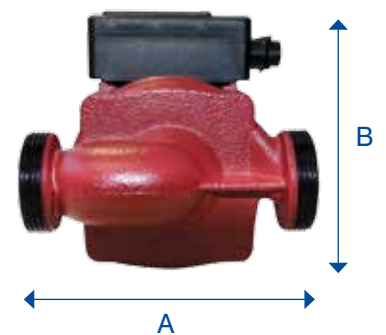

## DIMENSIONS

Dimensions	Speed	Head(m)	Auto
A=130mm	1	1	5 Watts
B=123mm	2	3	to
C=88mm	3	5	45 Watts





## Gate Type Pump Valves C

CODE	SIZE	PACK QTY
771042	¾"	Single
771043	1"	Single



## Ball Type Pump Valves C

CODE	SIZE	PACK QTY
771052	¾"	Single
771053	1"	Single



## Gate Type Pump Valves FI

CODE	SIZE	PACK QTY
771158	¾"	Single
771159	1"	Single




## Ball Type Pump Valves FI

CODE	SIZE	PACK QTY
771156	¾"	Single
771157	1"	Single

## General notes - ErP (ecological design-) directive

- The benchmark for the most efficient circulators is  $EEI \leq 0.20$
- Information on recycling/disposal: This product should be disposed of separately from household waste in line with local laws and regulations. When this product reaches its end of life, dispose of it at your local waste collection point/recycling centre. The separate collection and recycling of your product at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment

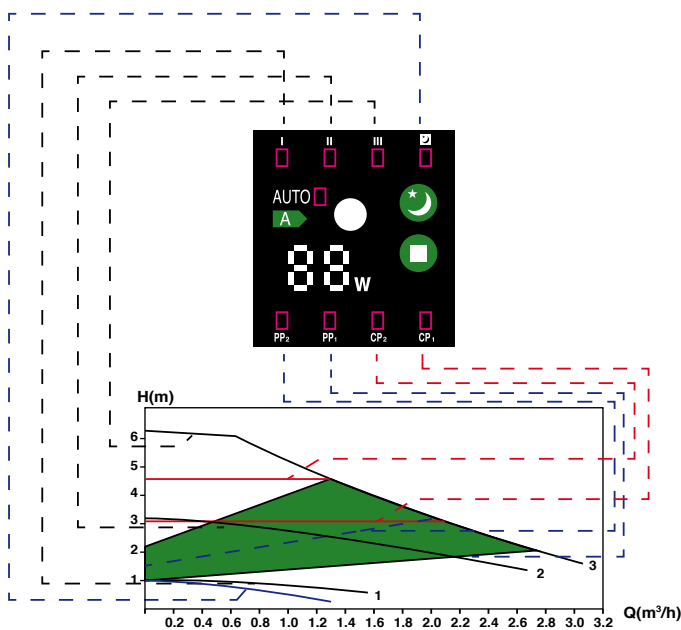


**SANBRA FYFFE**

# TUCSON-A

6 Metre Head A Rated Circulating Pump




**Box quantity: 8**

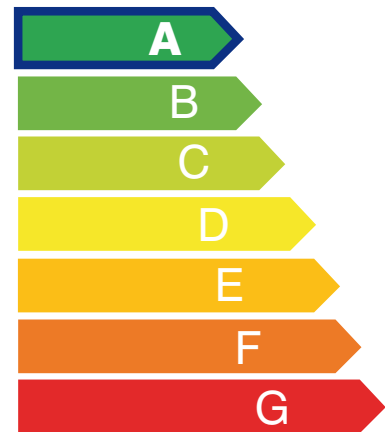

## TECHNICAL DATA

Code	771904
Efficiency	EEI ≤ 0.20
Voltage	Single Phase, 230 volts +/- 10%
Frequency	50 Hz
Speed	1 to 3 Speed, Auto
Isolation Class	F
Fluid Temperature Limits	-10C to 110C
Max Working Pressure	10 Bar
Minimum Working Pressure	0.05 bar @ 50C
Temperature Working Range	-10C to 50C
Waterproof Rating	IP44
Pump Weight	2.2 Kg

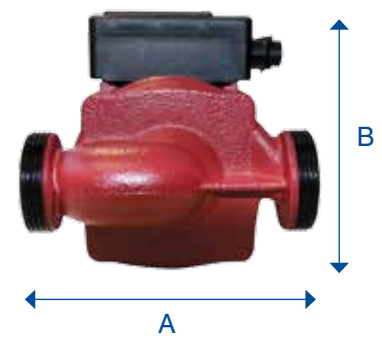

## DIMENSIONS

Dimensions	Speed	Head(m)	Auto
A=130mm	1	1	5 Watts
B=123mm	2	3	to
C=88mm	3	6	45 Watts





## Gate Type Pump Valves C

CODE	SIZE	PACK QTY
771042	3/4"	Single
771043	1"	Single



## Ball Type Pump Valves C

CODE	SIZE	PACK QTY
771052	3/4"	Single
771053	1"	Single



## Gate Type Pump Valves FI

CODE	SIZE	PACK QTY
771158	3/4"	Single
771159	1"	Single



## Ball Type Pump Valves FI

CODE	SIZE	PACK QTY
771156	3/4"	Single
771157	1"	Single

## General notes - ErP (ecological design-) directive

- The benchmark for the most efficient circulators is  $EEI \leq 0.20$
- Information on recycling/disposal: This product should be disposed of separately from household waste in line with local laws and regulations. When this product reaches its end of life, dispose of it at your local waste collection point/recycling centre. The separate collection and recycling of your product at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment

